


# T RED XL

## T-Pieces reduced XL

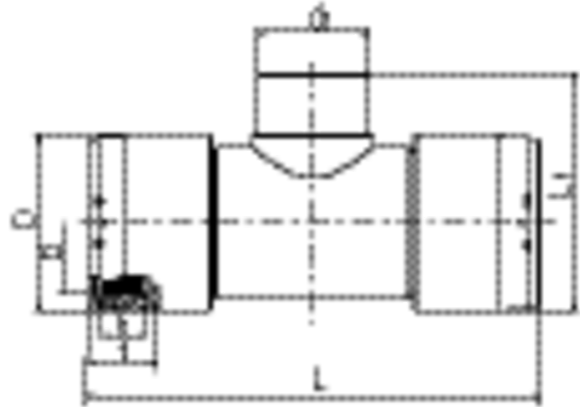

## T RED XL

### T-Pieces reduced XL

With exposed heating coils for optimal heat transfer, large insertion depth, wide fusion zones plus cold zones at the end and in the middle to prevent the flow of molten material, for use without holding devices. Separate fusion zones. Outlet spigot SDR 11 for processing of UB/MB couplers. Other branch dimensions can be created using MR d 225/160 or MR d 110/90 and MR d 110/63. Handling at the construction site is made easy thanks to the fused-on eyebolts.

Other dimensions on request.