


WUN 90

Transition Elbows 90° HD-PE/Brass with male thread

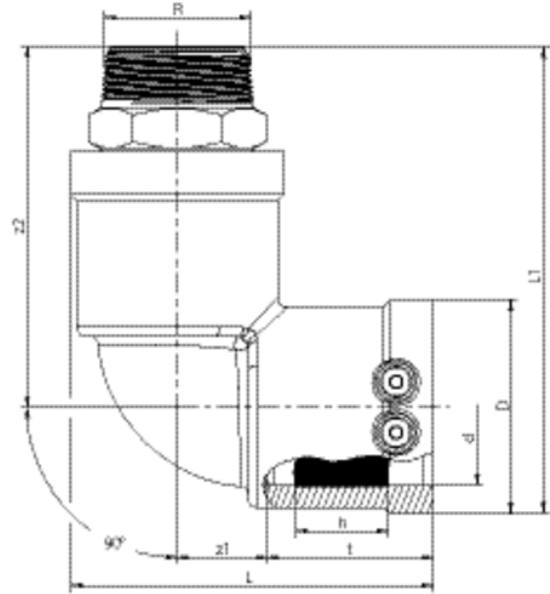

PE 100 SDR 11

Maximum working pressure 16 bar (water)



SKU	d	BX	PU	D	R	L	t	z ₁	z ₂	h	Weight kg
612120	32	20	1000	47	1"	85	42	21	89,00	24	0,340
612140	32	20	800	47	1 1/2"	94	42	21	93,00	24	0,470
612127	40	15	750	58	1"	102	46	27	101,00	30	0,500
612122	40	15	750	58	1 1/4"	102	46	27	103,00	30	0,520
612121	40	15	750	58	1 1/2"	102	46	27	104,00	30	0,560
612119	50	10	500	70	1"	118	53	30	110,00	30	0,680
612123	50	10	500	70	1 1/4"	118	53	30	112,00	30	0,670
612124	50	10	500	70	1 1/2"	118	53	30	113,00	30	0,680
612125	63	10	320	84	1 1/2"	128	53	33	116,00	35	0,980
612126	63	10	320	84	2"	128	53	33	121,00	35	1,000

Other thread sizes on request

FRIALEN safety fittings can be fused to pipes SDR11 - SDR 17.6. Minimum wall thickness $s_{min} \geq 3$ mm. Other SDR-stages on request. Please observe the marking directly at the product, which is mandatory. DVGW-Registration No. DV-7501AU2256

Standard: Brass. Gunmetal and V2A on request

WUN 90

Transition Elbows 90° HD-PE/Brass with male thread

Areas of Application

FRIALEN-Transition Elbows WUN 90° are threaded joints as an adaptor from a metal pipe with internal thread to a HD-PE pipe. Joint on the part of HD-PE by FRIALEN-Coupler.

Assembly Instructions

The threaded component must be held with a spanner to prevent it twisting in the HD-PE component. The fusion of the HD-PE side takes place by FRIALEN-fusing – leakproof and longitudinally strong.

The installation of the brass and the HD-PE side has to be prepared according to the general installation instructions (see "Transition Fittings with threaded connection" in "Assembly Instructions" for "FRIALEN-Safety Fittings for house connections and distribution pipes up to d 225"). This involves removing the oxide skin and cleaning the pipe ends.

WUN 90

Transition Elbows 90° HD-PE/Brass with male thread

Good reasons for using the FRIALEN-Transition Elbows WUN 90°:

- Compact construction
- HD-PE side with exposed heating element for optimal heat transfer
- Cold zones at the end to prevent the flow of molten material
- No holding clamps required
- Large insertion depth, extra wide fusion zones
- Brass end permanently anchored in the HD-PE and will not distort
- Self sealing patented sealing geometry without elastomer seal
- Additional barcode for tracing back the underground fitting (Traceability-Coding)